

Adprufe[®] AP3

Advanced admixture for integrally waterproof concrete structures

Product Description

Adprufe[®] AP3 is an innovative liquid admixture that significantly reduces the water absorption of concrete together with some effect on the reduction of drying shrinkage. By uniquely combining water repellence and shrinkage reduction technologies Adprufe AP3 provides a hydrophobic and pore blocking system together with a proven and award-winning chemistry that reduces the surface tension of the menisci in the millions of pores in the hardened concrete, thus reducing the shrinkage strain. Lower shrinkage results in reduced incidence of cracking in restrained concrete, improving the water resistance of the structure.

Enhanced Concrete Performance


This enhanced concrete performance is achieved by:

- Significantly reduced water absorption and penetration
- Reduction in drying shrinkage which produces fewer and thinner cracks
- A low water-cement ratio, which reduces capillary paths in the cured concrete
- High slump, workable concrete mix for ease of placement

When Adprufe AP3 is used with ADVA[®] high performance concrete admixtures, highly effective integrally waterproof concrete is achieved.

System Components

- Adprufe AP3 — liquid waterproof concrete admixture
- Adprufe AP3 — liquid waterproof concrete admixture
- Adcor[®] 500S — hydro-expansive waterstop system for construction joints and penetrations
- Betec[®] 350 — cementitious compound for sealing tie-bar holes
- Serviseal[®] AT — PVC/hydrophilic co-extruded waterstop for designed movement joints

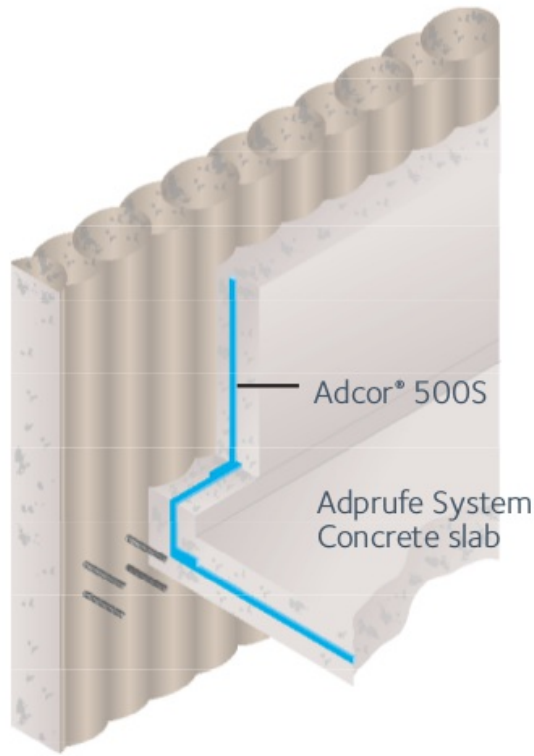

Advantages

| | MAIN CONTRACTOR | ARCHITECT | CONCRETE PRODUCER | DEVELOPER/ OWNER |
|---|-----------------|-----------|-------------------|------------------|
| Reduces permeability and drying shrinkage of concrete | | ● | ● | ● |
| Improved workability resulting in easier, more complete compaction | ● | | ● | |
| Can be used in all types of concrete, with all types of cementitious binders | ● | ● | ● | |
| No expansive agents | ● | ● | ● | |
| Can be combined with GCP membranes or cavity drain systems for enhanced protection in critical applications | ● | ● | | ● |

Applications

- Adprufe provides structurally integral waterproofing (Type B construction) as defined in BS 8102 1990 and is suitable for Basement grades 1 to 4
- Water-retaining structures
- Swimming pools
- Lift pits
- Tunnels

Adprufe is not intended or recommended for use in areas where concrete is expected to be exposed to repetitive freeze-thaw cycling, unless the concrete has been air-entrained. Consult GCP for further advice.

Design Criteria

Concrete structures must be designed in accordance with BS 8110 1997 Part 1, or a comparable code. A maximum design crack width of 0.3mm must be used in the reinforced concrete design.

All water-retaining structures must be designed in accordance with BS 8007 1987, or a comparable code. A maximum design crack width of 0.2mm or less must be used in the reinforced concrete design.

Additional design guidance for dwellings is given in the Approved Document, Basements for Dwellings.

Properties

Appearance: Straw coloured clear liquid

Air Entrainment: The product does not entrain additional air

Chloride Content: Nil

Specific Gravity: Approx. 0.86

Compatibility

With cements: Adprufe AP3 can be used with all types of Portland Cements, including sulphate-resisting cements. It is compatible with concrete containing pulverised fuel ash (pfa), ground granulated blast furnace slag (ggbfs) and microsilica. For other cement types consult GCP.

With other admixtures: As with all concrete admixtures, Adprufe AP3 should not be pre-mixed with other admixtures or chemicals. The product is engineered to be used with superplasticisers from GCP Applied Technologies, but must be added separately. Physical properties of the concrete may be adversely affected if Adprufe is used with other admixtures and chemicals.

Mix Design

Adprufe AP3 is engineered for use in concrete with medium to high workability and with a maximum water-cement ratio of 0.4. For best water absorption result, keep the concrete water-cement ratio at 0.40 or below. However, if a higher water-cement ratio is used, depending on project requirements, it is necessary to ascertain results through trial mixes. Adprufe AP3 admixture reduces the water absorption of hardened concrete. It is possible there may be compressive strength variances ranging from 0% to 15%, however the figure is typically less than 10%; mix designs should take this into account.

Curing

Concrete should be cured in accordance with the recommendations given in BS 8110 1997 Part 1, or a comparable code.

Packaging and Storage

Adprufe AP3 is supplied in bulk and 205L non-returnable containers or in 1,000L transi-tanks. Store under cover and protect from frost. If the product freezes, contact GCP Applied Technologies for advice.

Adprufe Concrete Typical Properties

| PROPERTIES | PLAIN CONCRETE | ADPRUFE AP3 |
|--|----------------|-------------|
| Adprufe AP3 dosage rate (L /m ³) | - | 3.5 |
| ADVA dosage rate (litre % B.W.C) | - | 1.3 |
| Typical Portland Blast Furnace Content (kg/m ³) | 400 | 400 |
| Free water-cement ratio | 0.45 | 0.38 |
| Concrete slump (mm) | 70 | 130 |
| Air content (%) | 1.7 | 2.8 |

Compressive strength (MPa)

| PROPERTIES | PLAIN CONCRETE | ADPRUFE AP3 |
|--|----------------|-------------|
| 7 days | 36.5 | 42.0 |
| 28 days | 50.5 | 59.5 |
| Water absorption @ 28 days (BS1881 Pt122)(%) | 2.5 | 0.55 |
| Water Permeability@28 days (DIN 1048 Pt5)(mm) | 27.4 | 8.0 |
| Drying Shrinkage@28 days (ASTM C157)(%) | 0.045 | 0.038 |

Addition Rates

| | ADDITION | PER |
|--|---------------------------|-----|
| Adprufe AP3 for waterproof concrete | 2.5 - 5.0L*m ³ | |

Addition rate can vary, depending on project requirements. Please consult your local GCP representative.

In mix designs proportioned for high strength concrete or durability, this level of strength reduction is typically not an issue. For established concrete mixtures where strength must be maintained, superplasticisers may be used to cut water to offset the strength reduction.

GCP recommends the use of ADVA superplasticiser (see separate product data sheet). Where alternative superplasticisers are used, ensure they produce the specified workability and maximum water-cement ratio, at the equivalent cement content. When non-GCP superplasticiser is being considered we recommend trial mixes to ensure compatibility. For further advice consult GCP Applied Technologies.

Dispensing Equipment

Please contact your local GCP representative for further information regarding the dispensing equipment for this product.

Concrete Placement

Place concrete in accordance with the recommendations of BS 8000-9:2003, or a comparable code. Fully compact all concrete using best practices. Do not place concrete when ambient temperatures are 5°C or less. Refer also to Material Safety Data Sheet for guidance.

Health and Safety

Read the product label and Material Safety Data Sheet before use. Users must comply with all risk and safety phrases.

gcpat.in | India customer service: +91 124 4885915

Australia 1800 855 525 New Zealand +64 9 448 1146 China Mainland +86 21 3158 2888 Hong Kong +852 2675 7898 India +91 124 488 5900 Indonesia +62 21 893 4260 Japan +81 3 5226 0231 Korea +82 32 820 0800 Malaysia +60 3 9074 6133 Philippines +63 49 549 7373 Singapore +65 6265 3033 Thailand +66 2 709 4470 Vietnam +84 8 3710 6168

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

Adprufe, ADVA, Betec, Adcor, Daracem, Serviseal, MIRA & MIRA are trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies, Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2017 GCP Applied Technologies, Inc. All rights reserved.

GCP Applied Technologies Inc., 62 Whittemore Avenue, Cambridge, MA 02140, USA Printed in Singapore | 07/16 | 300-Adprufe-72

This document is only current as of the last updated date stated below and is valid only for use in India. It is important that you always refer to the currently available information at the URL below to provide the most current product information at the time of use. Additional literature such as Contractor Manuals, Technical Bulletins, Detail Drawings and detailing recommendations and other relevant documents are also available on www.gcpat.in. Information found on other websites must not be relied upon, as they may not be up-to-date or applicable to the conditions in your location and we do not accept any responsibility for their content. If there are any conflicts or if you need more information, please contact GCP Customer Service.

Last Updated: 2018-08-24

gcpat.in/solutions/products/liquid-waterproofing/adprufe-ap3